



For after Sales support Contact:
BDS FIRE Shepley House Restmor Way
Hackbridge Surrey SM6 7AH
Tel 020 8773 3377
E: info@bds-fire.co.uk W: www.bds-fire.co.uk



FAAST™ LT

Fire Alarm Aspiration Sensing Technology

Data Sheet



The FAAST LT Aspirating Smoke Detector is designed with the installer and end user in mind. It serves the wide variety of Class C applications where maintenance is difficult, other smoke detection methods are inappropriate or prone to fail due to harsh environments or areas where aesthetics matters. It is also suitable for smaller mission critical applications where very early warning - Class A or B detection is required.

FAAST LT combines proven aspiration detection technologies to deliver reliable smoke detection and efficient installation and maintenance. The device includes high sensitivity laser fire detection, ultrasonic flow sensors, and internal design features to protect vulnerable components from environmental and human threats. The device is fast to install and easy to commission thanks to PIPE IQ LT pipe design and configuration software which is included as standard.

FAAST LT devices are available as single channel and dual channel devices, offering flexibility for different detection strategies. A range of customisable settings are geared towards maximising device performance and meeting different application needs.

The detector provides alarm and fault relays with auxiliary events relay as an option. These can be set as latched or non-latched. To accommodate local installation standards or environments, flow and general fault delays can also be set.

Features

- Single & Dual channel versions with independent channels including fan, sensor and flow monitoring
- Multiple event logging up to 2240 events
- Ultrasonic airflow sensing
- PipelQ™LT software provides intuitive system layout and configuration all in one package
- User friendly air flow pendulum graph for verification of pipe network functionality
- Protected electronics from air flow and accidental damage during installation or maintenance
- Easily replaceable and reusable filter without affecting the rest of the device
- Designed for efficient wiring and installation: cable gland holes, easy access to the wiring area and no special tools required.
- Easy access to parts requiring routine maintenance: filter(s) or sensors(s).
- IP65 enclosure

This document is not intended to be used for installation purposes. Every care has been taken in the preparation of this document but no liability can be accepted for the use of the information therein. Design features may be changed or amended without prior notice.

For more information, contact:
NOTIFIER, Caburn House, 2B Brooks Road, Lewes, East Sussex, BN7 2BY, UK
Phone: +44 (0) 1444 230 300 Fax: +44 (0) 1444 230 888

ISO9001
Design, Manufacture and
Supply to Quality Manage-
ment Systems Certified to
ISO9001:1994





FAAST™ LT

FAAST LT delivers a flexible solution for applications where standard detection methods are prone to failure or false alarm. Designed with the installer and end user in mind, the device serves a wide variety of EN54-20 Class C applications where maintenance is difficult, other smoke detection methods are inappropriate, due to harsh environments, or areas where aesthetics matters.

FAAST LT is ideal for remote applications where stand-alone detectors are needed. The device is fast to install, easy to configure and includes installation and commissioning software PipelQ LT.



Specifications

FAAST™ LT FL0122E, FL0112E, FL0111E

Mechanical Specification

- Height 403 mm (including inlets & outlets)
- Width 356 mm
- Depth 135 mm
- Cable Access Knock out cable gland holes
- Wire Gauge 0.5 mm² to 2 mm²
- Maximum Single Pipe Length 100 m
- Maximum Total Branched Pipe Length 160 m (per channel)
- Maximum Air Inlet Holes 18 holes (per channel)
- Coverage Area up to 2000m²
- Outside Pipe Diameter 25 mm or 27 mm
- Internal Pipe Diameter 15-21 mm
- Sensitivity Range (obscuration) 0.07%/m
- Relays per channel 3 (1 Alarm, 1 Fault, 1 Pre-alarm)
- Sounder Outputs 1 per channel
- Event Log 2244 events
- Interfaces Terminal blocks: power supply, relays, sounder outputs, external input; USB port; Buttons (Test, Reset, Disable)
- Power supply & relays connections 2mm² max
- USB Standard USB cable for Type B USB Connection
- Shipping Weight 6.5kg, (dual channel) includes packaging
- Flow monitoring and reporting High & low according to EN54-20
- Filtration Replaceable filter
- Fan control 10 programmable speeds

Electrical Specification

- Smoke Sensor Optical laser point type
- External Supply Voltage 18.5 - 31.5 VDC
- Remote Reset Time 2 seconds
- Power Reset 0.5 seconds
- Avg. Operating Current (excluding sounders)
 - 1 Channel Device 170mA @ 24 VDC
 - 2 Channel Device 270mA @ 24 VDC
- Max. Average Operating Current (excluding sounders)
 - 1 Channel Device 360mA @ 24 VDC
 - 2 Channel Device 570mA @ 24 VDC
- Relay Contact Ratings 2.0A @ 30 VDC, 0.5A @ 30 VAC

Environmental Specifications

- Operating Temperature -10°C to 55°C
- Humidity Range 10 to 93% (non-condensing)
- IP Rating IP65


Listings and Approvals

- CPD
- LPCB
- EN54-20 (holes per channel)
 - Class A – 3 holes
 - Class B – 6 holes
 - Class C - 18 holes







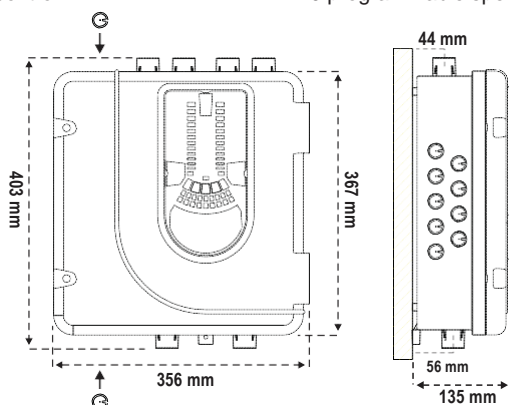

User Interface Display

The front panel will be different depending on which of the 3 models is being installed. The following information is displayed:

- Alarm level; Alarm,
- Particulate Levels; 1-9
- Fault Status
- Flow Level
- Test, Reset and Disable Buttons



Product Range at a Glance

FAAST LT Stand Alone Aspirating Systems		Part Number
	Single channel, single detector FAAST LT aspirating unit complete with relay outputs. Also includes built in filter.	FL0111E
	Single channel, dual detector FAAST LT aspirating unit complete with relay outputs. Also includes built in filter.	FL0112E
	Dual channel, dual detector FAAST LT aspirating unit complete with relay outputs. Also includes built in filter.	FL0122E
FAAST LT Loop Connected Aspirating Systems		Part Number
	Single channel FAAST LT aspirating unit fitted with 1 VIEW laser detection chamber. Also includes built in filter.	NFXI-ASD11
	Single channel FAAST LT aspirating unit fitted with 2 VIEW laser detection chambers. Also includes built in filter.	NFXI-ASD12
	Dual channel FAAST LT aspirating unit fitted with 2 VIEW laser detection chambers. Also includes built in filter.	NFXI-ASD22
FAAST LT specific accessories		
	Earth Bar	F-LT-EB
	FAAST LT Replacement internal filter (Pack of 6)	F-IS-6

For a full range of filters, pipework and accessories please refer to the Notifier FAAST Planning and Pipe Guide



For after Sales support Contact:
 BDS FIRE Shepley House Restmor Way
 Hackbridge Surrey Tel 020 8773 3377
 E: info@bds-fire.co.uk W: www.bds-fire.co.uk

